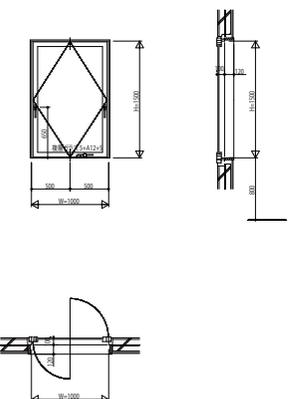
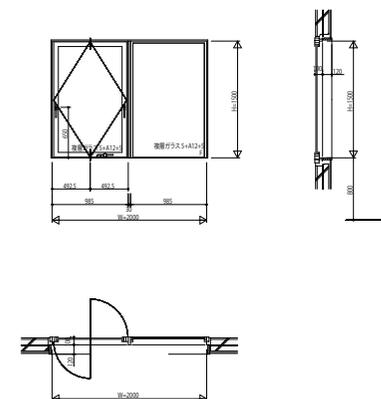
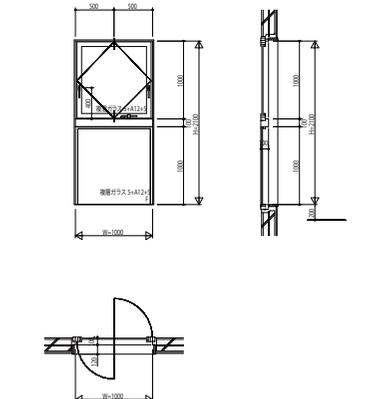


BFDPPJ27 省エネ商品 YDP-100 つらいち枠 縦軸回転窓

| 縦軸回転窓 | 縦軸回転窓、はめ殺し窓連窓 | 上段縦軸回転窓、下段はめ殺し窓 | | |
|--|---|--|--|---|
| W=1,000 H=1,500 | W=2,000 H=1,500 | W=1,000 H=2,100 | | |
|  |  |  | | |
| | | | | |
| | | | | <p>YDP-100 縦軸回転窓 性能等級</p> <p>耐風圧性 S-5 (2400Pa) S-6 (2800Pa) S-7 (3600Pa)</p> <p>気密性 A-4 (2等級線)</p> <p>水密性 W-5 (500Pa)</p> <p>遮音性 T-2 (30等級線)</p> <p>断熱性 H-3 (0.287m²・K/W以上) (複層ガラス5+A12+5の場合)</p> <p>ただし、窓種・サイズにより適応値が異なります。</p> |