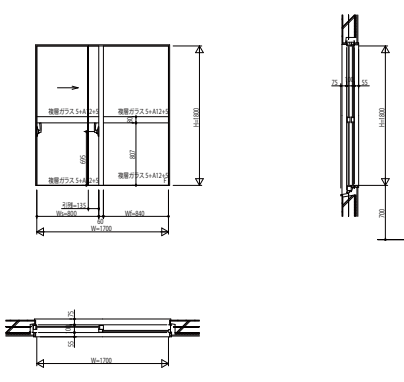
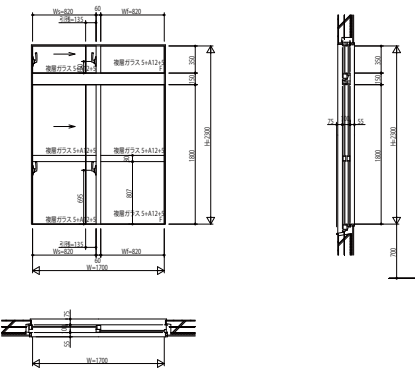
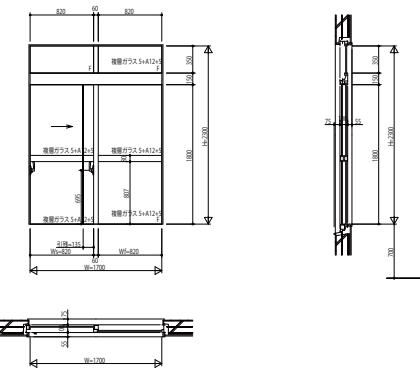
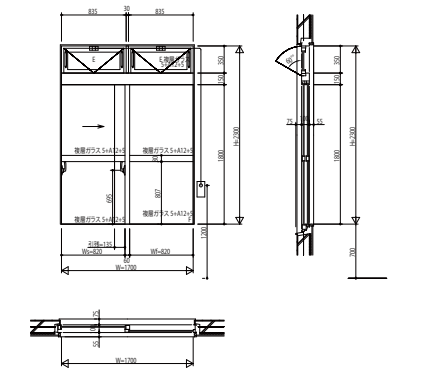
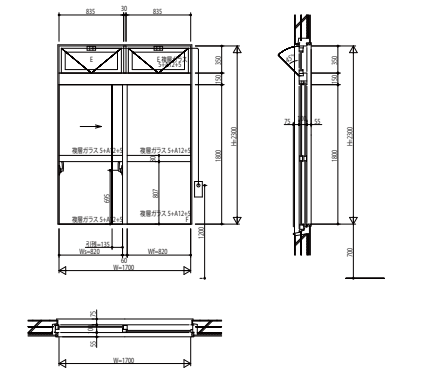
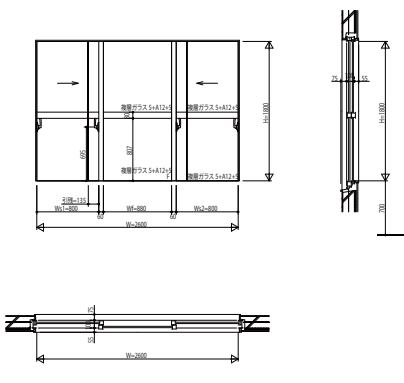
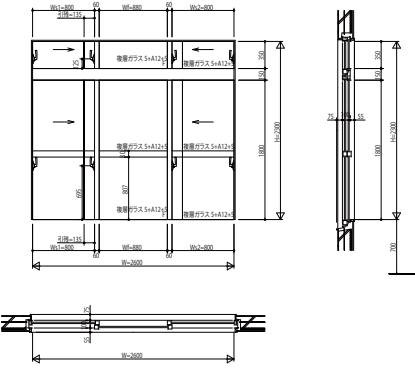
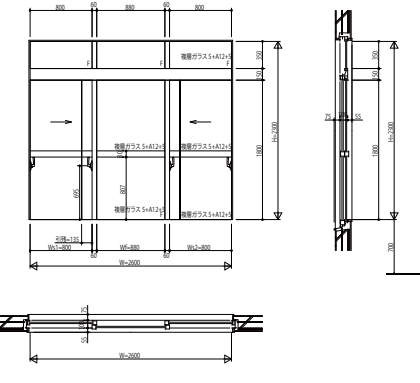
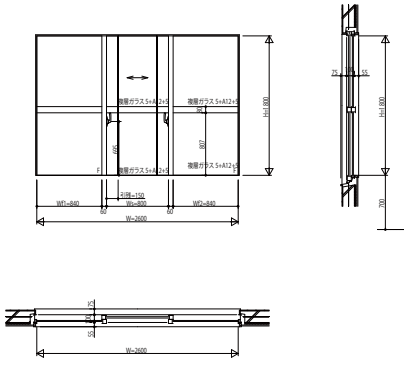
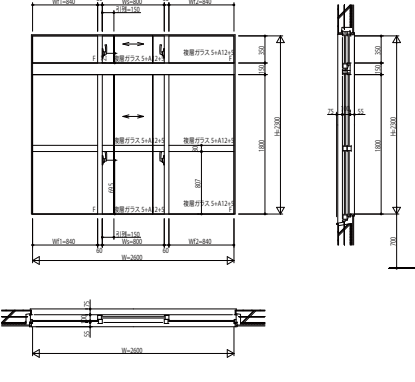
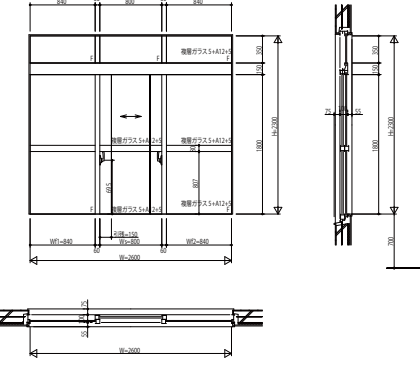


BRDSSL22 省エネ商品 YDS-100 RC枠 片引き窓

<p>片引き窓(外動)</p> <p>W=1,700 H=1,800</p> 	<p>ランマ片引き、片引き窓(外動)</p> <p>W=1,700 H=2,300</p> 	<p>ランマはめ殺し2連、片引き窓(外動)</p> <p>W=1,700 H=2,300</p> 	<p>ランマ外倒し2連(排煙窓)、片引き窓(外動)</p> <p>W=1,700 H=2,300</p> 	<p>ランマ外倒し2連(隠蔽式排煙窓)、片引き窓(外動)</p> <p>W=1,700 H=2,300</p> 
<p>両袖片引き窓(外動)</p> <p>W=2,600 H=1,800</p> 	<p>ランマ両袖片引き、両袖片引き窓(外動)</p> <p>W=2,600 H=2,300</p> 	<p>ランマはめ殺し2連、両袖片引き窓(外動)</p> <p>W=2,600 H=2,300</p> 		
<p>自由片引き窓(外動)</p> <p>W=2,600 H=1,800</p> 	<p>ランマ自由片引き、自由片引き窓(外動)</p> <p>W=2,600 H=2,300</p> 	<p>ランマはめ殺し2連、自由片引き窓(外動)</p> <p>W=2,600 H=2,300</p> 		<p>YDS-100 片引き窓 性能等級</p> <p>耐風圧性 S-5 (2400 Pa) S-6 (2800 Pa) S-7 (3600 Pa)</p> <p>気密性 A-4 (2等級線)</p> <p>水密性 W-5 (500 Pa)</p> <p>遮音性 T-2 (30等級線)</p> <p>断熱性 H-3 (0.287m²・K/W以上) (複層ガラス5+A12+5の場合)</p> <p>ただし、窓種・サイズにより適応値が異なります。</p>