
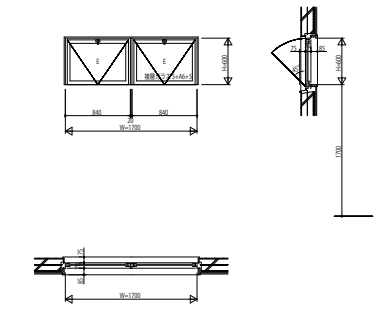

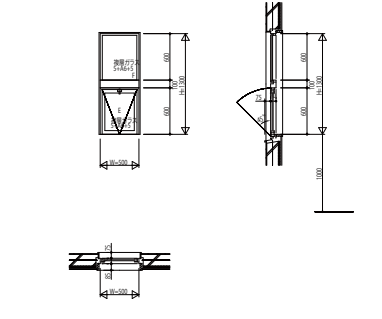
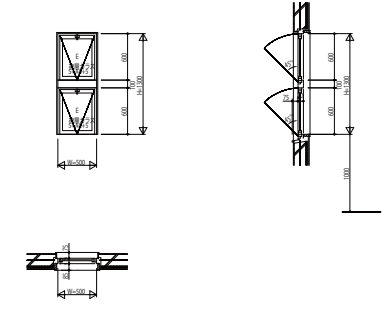
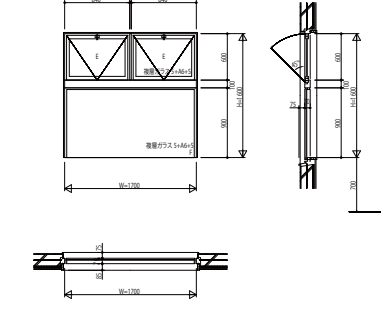



BRDXPJ02 省エネ商品 YDEX-70 RC枠 外倒し窓

<p>外倒し窓 W=800 H=600</p> 	<p>外倒し窓連窓 W=1,700 H=600</p> 			
<p>上段外倒し窓、下段はめ殺し窓 W=500 H=1,300</p> 	<p>上段はめ殺し窓、下段外倒し窓 W=500 H=1,300</p> 	<p>上段外倒し窓、下段外倒し窓 W=500 H=1,300</p> 	<p>上段外倒し窓2連、下段はめ殺し窓 W=1,700 H=1,600</p> 	
<p>外倒し窓 (排煙窓) W=800 H=600</p> 				<p>YDEX-70 外倒し窓 性能等級</p> <p>耐風圧性 S-5 (2400Pa) S-6 (2800Pa) S-7 (3600Pa)</p> <p>気密性 A-4 (2等級線)</p> <p>水密性 W-5 (500Pa)</p> <p>遮音性 T-2 (30等級線)</p> <p>断熱性 H-2 (0.246m<sup>2</sup>·K/W以上) (複層ガラス)</p> <p>ただし、窓種・サイズにより適応値が異なります。</p>