



Technical drawing of a rectangular floor plan. The overall dimensions are $L=6010$ (vertical) and $D=9410$ (horizontal). The horizontal dimension is divided into two equal segments of $D1=4600$ and $D2=4600$. The vertical dimension is divided into two segments: $L1=1055$ (bottom) and $L2=3742$ (top). The top edge features three rectangular elements labeled 'a', 'c', and 'b' from left to right. The bottom edge features three rectangular elements. The drawing includes a grid system with dashed lines and dimension lines.

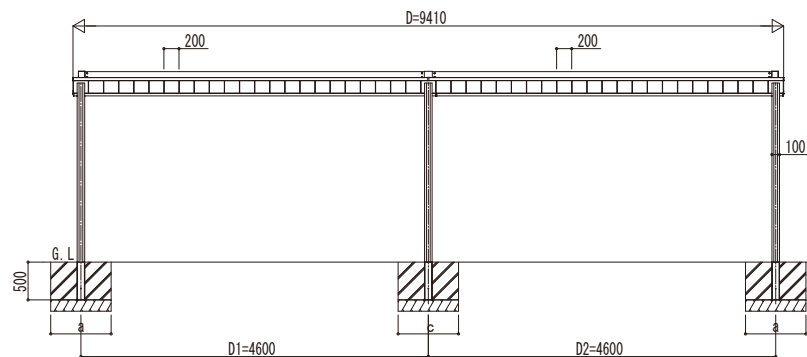

間口呼称	奥行呼称	独立基礎			土間コンクリート考慮基礎		
		地耐力 (kN/m ²)			地耐力 (kN/m ²)		
		30	50	100	30	50	100
		c・d	c・d	c・d	c・d	c・d	c・d
48×48	50	950	950	950	600	600	600

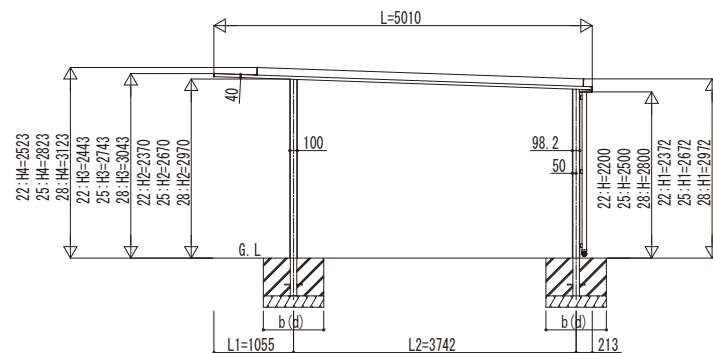

土間コンクリート考慮基礎の場合

変更記事	設計監理	工事名 工事	照査	担当	作図	尺度	御承認印	図番
	施工							図面内容 カーポート プレーンルーフ 600タイプ 2台用 間口連結セット 丸柱 姿図 50-48・48