


Technical drawing of a rectangular hall layout for a 200-person assembly. The hall is 5810 units long and 9410 units wide. It features a central aisle (D=9410) and side aisles (D1=4600, D2=4600). There are 10 rectangular tables arranged in a grid. Dimensions for table placement are given as L1=1205 and L2=3400. Specific table dimensions are labeled: a, b, c, and d.

Technical drawing of a double-row metal shelving unit. The top part shows a perspective view of the shelving unit with 6 rows and 2 columns. The bottom part shows a side elevation with dimensions: total width $D=9410$, row height 200, shelf thickness 100, and column spacing $D1=4600$ and $D2=4600$. The unit is supported by three columns on a base.

間口呼称	奥行呼称	独立基礎			土間コンクリート考慮基礎		
		地耐力 (kN/m ²)			地耐力 (kN/m ²)		
		30	50	100	30	50	100
		c・d	c・d	c・d	c・d	c・d	c・d
48×48	58	1000	1000	1000	650	650	650

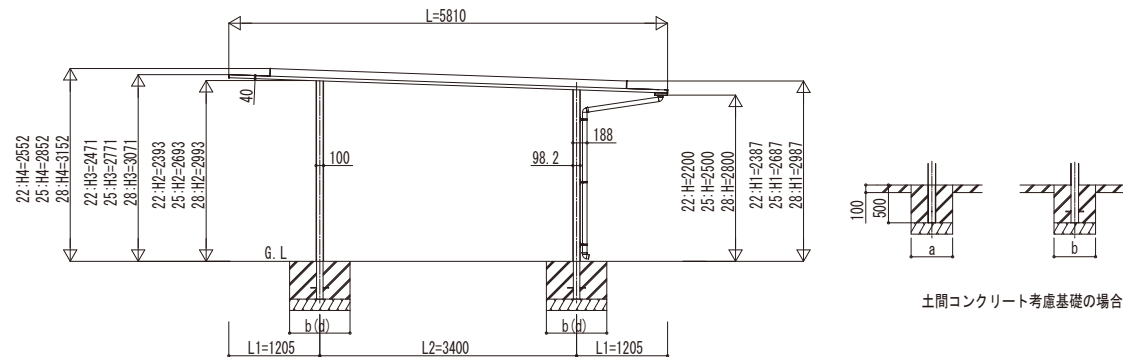

変更記事	設計整理	工事名	照査	担当	作図	尺度	御承認印	図番
	施工	工事内容 カーポート プレーンルーフ 600タイプ 2台用 間口連結セット 柱中央タイプ 丸柱 姿図 58-48・48					年 月 日	通し図番