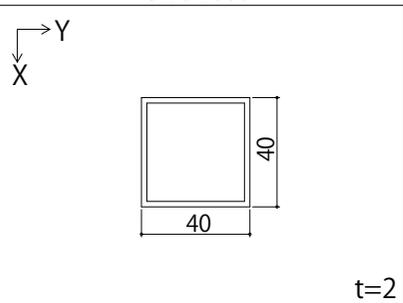
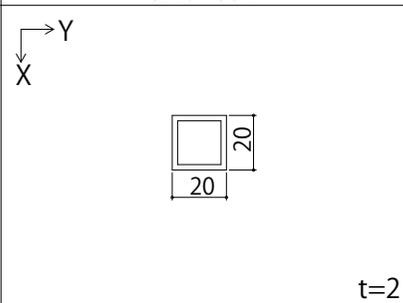
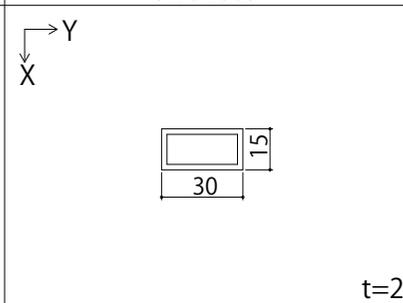
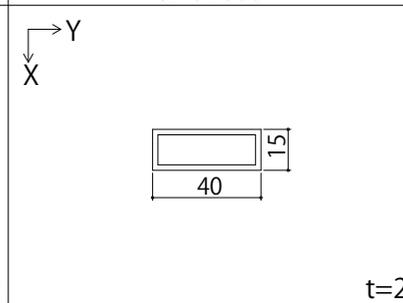
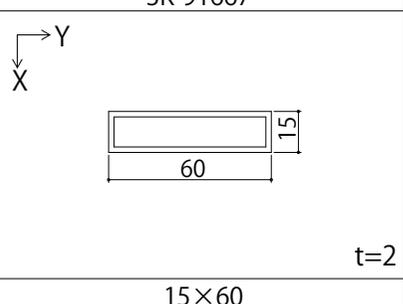
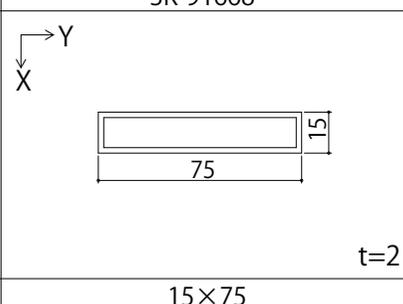
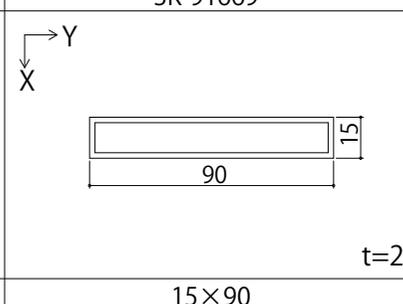
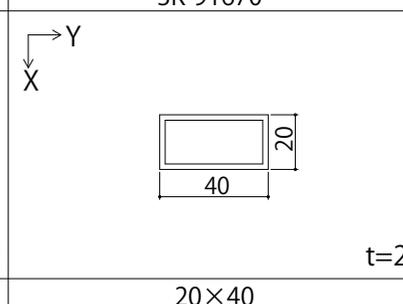


品名		柱・格子材			
種類	40×40	20×20	15×30	15×40	
型番	3K-91660	3K-91661	3K-91665	3K-91666	
寸法図					
	外形寸法	40×40	20×20	15×30	15×40
ユニット記号	AHY-KA29-60-1   AHY-KA29-40-1	AHY-KA30-60-1   AHY-KA30-40-1	AHY-KA31-60-1	AHY-KA32-60-1	
材質	A6063S		A6063S	A6063S	
単重(kg/m)	0.820	0.388	0.442	0.550	
断面二次モーメント (cm <sup>4</sup> )	Ix	7.33	0.79	0.55	0.72
	Iy	7.33	0.79	1.76	3.72
断面係数 (cm <sup>3</sup> )	Zx	3.67	0.79	0.74	0.97
	Zy	3.67	0.79	1.17	1.86

品名		柱・格子材			
種類	15×60	15×75	15×90	20×40	
型番	3K-91667	3K-91668	3K-91669	3K-91670	
寸法図					
	外形寸法	15×60	15×75	15×90	20×40
ユニット記号	AHY-KA33-60-1	AHY-KA34-60-1	AHY-KA35-60-1	AHY-KA36-60-1	
材質	A6063S		A6063S	A6063S	
単重(kg/m)	0.766	0.928	1.090	0.604	
断面二次モーメント (cm <sup>4</sup> )	Ix	1.07	1.32	1.58	1.44
	Iy	10.89	19.91	32.79	4.44
断面係数 (cm <sup>3</sup> )	Zx	1.42	1.76	2.10	1.44
	Zy	3.63	5.31	7.29	2.22

※材質はJIS H 4100による

変更記事	設計監理
	施工

工事名	照査	担当	作図	尺度	御承認印
図面内容				1/1	
エクステリア共通 汎用形材 柱・格子材					

図番	年月日	通し図番

YKK  
ap

